




SEE THE WORLD IN A NEW WAY

AUTOMATION PRODUCT CATALOG

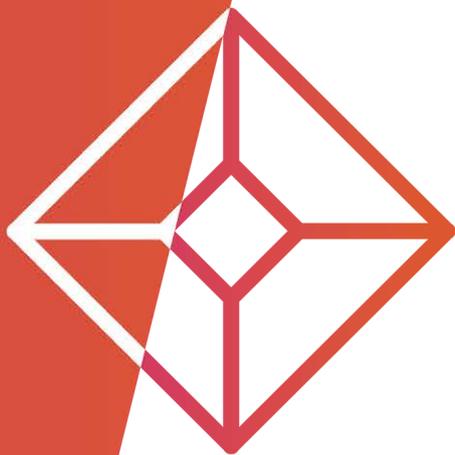

CONTENTS

1

ABOUT HIKMICRO

ABOUT HIKMICRO	4
----------------------	---

2

PRODUCT INTRODUCTION

PRODUCT INTRODUCTION	7
----------------------------	---

3

SOFTWARE SUPPORT

HIKMICRO STUDIO	18
HIKMICRO ANALYZER	19

ABOUT HIKMICRO

HIKMICRO is a leading provider of thermal imaging equipment and solutions. Specializing in thermal technology innovation, the company offers thermal cores, modules, cameras, total solutions, and also night vision products, which can be used in outdoor, industrial, and security industries globally, serving customers in over 100 countries and regions.



COMPANY STRENGTHS

Free Long Warranty

HIKMICRO provides a 3-10 warranty period (from the date of purchase) that exceeds the industry standard level of handheld thermography products. For details, please refer to the following:

- ♦ 3 years components and labor coverage for the full product
- ♦ 10 years of coverage for the detector - the most important part of the whole product!



Local Repair Service

- ♦ HIKMICRO provides customers with comprehensive maintenance services to ensure the stable operation of your products and respond to failures in the shortest possible time, minimizing camera downtime.

Local Support and Training Service

- ♦ International subsidiaries and local offices provides localized marketing and technical support. Professional technicians train the staff of authorized stores regularly.
- ♦ HIKMICRO provides immediate technical consultation via official site, email and 24 hours hotline.

Global Calibration Services

- ♦ HIKMICRO is pleased to offer official calibration and authorization calibration services for end users through our global sites. Contact your local office for details.



PRODUCT STRENGTHS

Image Frequency

Up to 50 Hz delivers smooth video and measurements while panning across scenes or viewing moving targets.

Accuracy

Up to $\pm 2^{\circ}\text{C}$ accuracy and repeatable temperature measurements based on our high stability detector, optics design, and quality control.

MULTIPLE INTEGRATION SOLUTIONS

Support Onvif, ISAPI, SDK temperature data output, open type network Video interface protocol, personalized according to demand.

Network SDK for Windows
32-bit/64-bit

Network SDK for Android and iOS

ISAPI protocol docs

Modbus RS-485 and TCP/IP docs




Box Camera

- Outstanding image quality with up to 640x512 pixels
- High frame rate up to 50 fps
- Temperature measurement range from -20° C to 550° C with accuracy of ± 2° C or ± 2 %
- Multiple protocols for easy integration




APPLICATIONS



Fuel Tank Welding



Plasma Coating



Food Processing



Rear Window Glass Heater


Model No.		HM-TD2037T-4/X	HM-TD2037T-7/X	HM-TD2037T-15/X	HM-TD2037T-25/X	HM-TD2037T-10/X	HM-TD2067T-6/X	HM-TD2067T-15/X	HM-TD2067T-25/X	
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays								
	Resolution	384 × 288					640 × 512			
	Spectral Range	8 μm to 14 μm								
	NETD	<35 mK (25 °C, F# = 1.0)								
	Focal Length	4.5 mm	6.5 mm	15 mm	25 mm	9.7 mm	6.3 mm	15 mm	25 mm	
	Focus Mode	Focus Free								
	IFOV	3.78 mrad	2.62 mrad	1.13 mrad	0.68 mrad	1.75 mrad	2.70 mrad	1.13 mrad	0.68 mrad	
	Field of View	90° × 65.2°	60° × 44.1°	24.3° × 18.4°	14.8° × 11.2°	37.5° × 28.5°	88.5° × 73.2°	41.9° × 33.4°	24.5° × 19.7°	
	Image Frequency	50 Hz								
	Min. Focusing Distance	0.3 m	0.6 m	3 m	5 m	1.5 m	0.6 m	3 m	5 m	
Measurement and Analysis	Object Temperature Range	-20 °C to 150 °C (-4 °F to 302 °F), 0 °C to 550 °C (32 °F to 1022 °F)								
	Temperature Accuracy	Max (± 2 °C, ± 2%)								
	Measurement Presets	Hot Spot, Cold Spot								
	Measurement Tools	User-definable: 10 spots, 1 line, and 7 rectangles.								
Network	Integration Protocols	Modbus TCP, Modbus RTU, Onvif, SDK, ISAPI								
Interface	Alarm Input	1, alarm input (0-3.3 VDC)								
	Alarm Output	1, alarm output; NC, level quantity								
	Analog Output	1, CVBS output								
	Communication Interface	1, RJ45 10 M/100 M self-adaptive Ethernet interface 1, RS-485 interface (Modbus available)								
General	Power Supply	10-30 VDC, Max. 2.3 W					10-30 VDC, Max. 2.5 W			
	Protection Level	IP40								
	Dimensions	67 mm × 45 mm × 45 mm (2.64" × 1.77" × 1.77")	67 mm × 45 mm × 45 mm (2.64" × 1.77" × 1.77")	67 mm × 45 mm × 45 mm (2.64" × 1.77" × 1.77")	74 mm × 45 mm × 45 mm (2.91" × 1.77" × 1.77")	67 mm × 45 mm × 45 mm (2.64" × 1.77" × 1.77")	99.5 mm × 45 mm × 45 mm (3.92" × 1.77" × 1.77")	77.7 mm × 45 mm × 45 mm (3.06" × 1.77" × 1.77")	79.7 mm × 45 mm × 45 mm (3.14" × 1.77" × 1.77")	

Bi-spectrum Cube Camera

- Thermal camera with 160 x 120 pixels and visible camera with 1600x1200 pixels
- Spot, regions, and line measurements
- Magnet adapter for easy installation
- Alarm input and output



APPLICATIONS

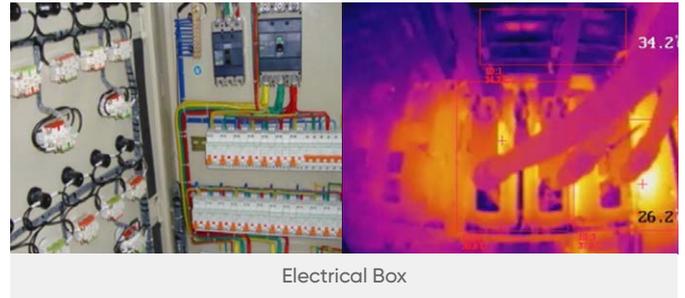



Model No		DS-2TD3017T-2/V	DS-2TD3017T-3/V
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays	
	Resolution	160 x 120	
	Spectral Range	8 μm to 14 μm	
	NETD	<40 mK (@25 °C, F# = 1.1)	
	Focal Length	1.8 mm	3.1 mm
	Focus Mode	Focus Free	
	IFOV	9.44 mrad	5.48 mrad
	Field of View	90° x 66.4°	50° x 37.2°
	Min. Focusing Distance	0.1 m	0.15 m
Visual Camera	Resolution	1600 x 1200	
Measurement and Analysis	Object Temperature Range	20 °C to 150 °C (-4 °F to 302 °F), 0 °C to 550 °C (32 °F to 1022 °F)	
	Temperature Accuracy	Max (± 2 °C, ± 2%)	
	Measurement Tools	Display Max. and Min. temperature in live view; 3 temperature measurement rule types, 21 rules (10 points, 10 regions, and 1 line).	
Interface	Communication Interface	1, RJ45 Ethernet port	1, RS-485 interface
General	Power Supply	10-30 VDC, Max. 5 W PoE (802.3af, class 2)	
	Protection Level	IP67	
	Dimensions	56 mm x 38.8 mm x 110 mm (2.20" x 1.53" x 4.33")	

Cube Camera

- High sensitivity sensor with 160x 120 pixels
- Spot, line and box measurements
- Wide field of view up to 114°
- Small size and compact design
Magnet adapter for easy installation



APPLICATIONS

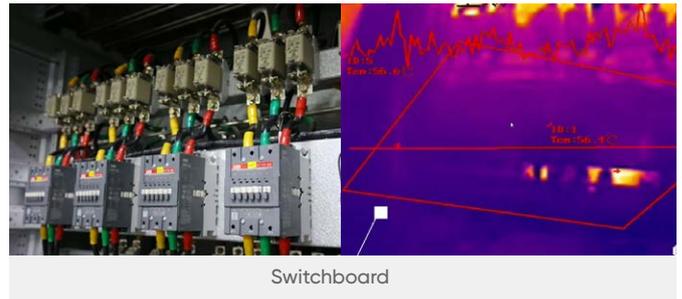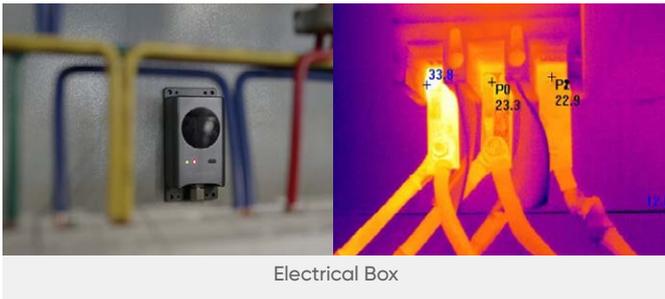




Model No		HM-TD3117T-1/Q	HM-TD3117T-2/Q
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays	
	Resolution	160 × 120	
	Spectral Range	8 μm to 14 μm	
	NETD	<40 mK (@25 °C, F# = 1.1)	
	Focal Length	1.3 mm	1.9 mm
	Focus Mode	Focus Free	
	IFOV	13.08 mrad	8.95 mrad
	Field of View	114° × 89°	90° × 65.3°
	Image Frequency	25 Hz	
	Min. Focusing Distance	0.1 m	
Measurement and Analysis	Object Temperature Range	-20 °C to 150 °C (-4 °F to 302 °F), 0 °C to 550 °C (32 °F to 1022 °F)	
	Temperature Accuracy	Max (± 2 °C, ± 2%)	
Interface	Communication Interface	1, RJ45 10 M/100 M self-adaptive Ethernet interface 1, RS-485 interface (Modbus available)	
General	Power Supply	12 VDC ± 25%, Max. 2 W	
	Protection Level	IP67	
	Dimensions	102 mm × 51.1 mm × 27.5 mm (4.0" × 2.0" × 1.1")	

High Temperature Box Camera

- High sensitivity sensor with 640 x 512 pixels
- Autofocus lens
- Temperature measurement range from 0°C to 1800°C with accuracy of $\pm 2^\circ\text{C}$ or $\pm 2\%$
- Multiple protocols for easy integration



APPLICATIONS

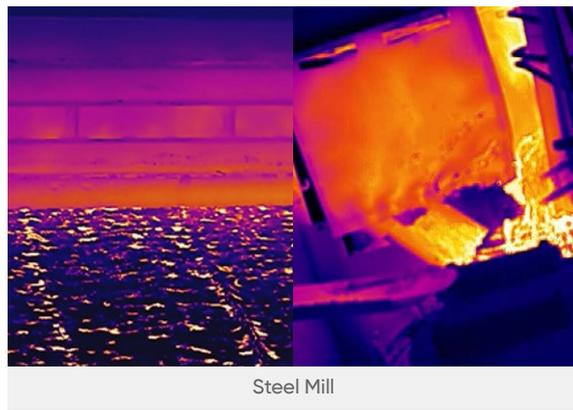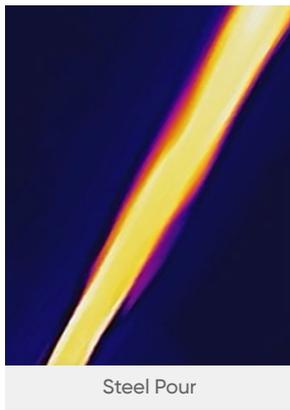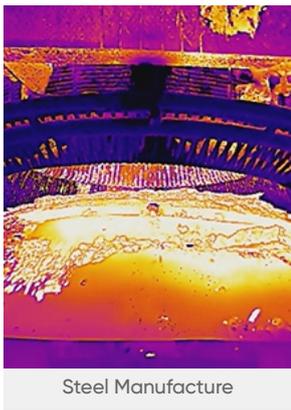

Model No		HM-TD2A67H1-15/Q	HM-TD2A67H1-25/Q
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays	
	Resolution	640 x 512	
	NETD	< 35 mK (@25°C, F# = 1.0)	
	Focal Length	15 mm	25 mm
	Focus Mode	Auto & Manual	
	IFOV	1.13 mrad	0.68 mrad
	Field of View	41.5° x 33.3°	24.8° x 19.9°
	Image Frequency	50 Hz	
	Min. Focusing Distance	0.5 m	
Measurement and Analysis	Object Temperature Range	0°C to 800°C (32°F to 1472°F), 600 °C to 1800 °C (1112°F to 3272 °F)	
	Temperature Accuracy	Object temperature 100°C to 1800°C (212°F to 3272°F) $\pm 2\%$ for ambient temperature 18°C to 25°C (64.4°F to 77°F) and $\pm 3\%$ for ambient temperature 25°C to 50°C (64.4°F to 77°F)	
	Measurement Presets	Hot Spot, Cold Spot	
Network	Integration Protocols	Modbus TCP, Modbus RTU, Onvif, SDK, ISAPI	
Interface	Alarm Input	1, alarm input (0-3.3 VDC)	
	Alarm Output	1, alarm output; NC, level quantity	
	Analog Output	1, CVBS output	
	Communication Interface	1, RJ45 10 M/100/1000 M self-adaptive Ethernet interface 1, RS-485 interface (Modbus available)	
General	Power Supply	10-30 VDC	
	Protection Level	IP40	
	Dimensions	93 mm x 50 mm x 50 mm (3.66" x 1.97" x 1.97")	

Explosion-proof Bullet Camera

- Thermal camera with 384 x 288 pixels and visible camera with 2688x1520 pixels
- Temperature measurement range from 0 to 550°C
- 316L stainless steel enclosure with NEMA 4X
- ATEX and IECEx certified for hazardous area



APPLICATIONS



Mining Industry



Explosive Material Warehouse



Oil Workshop

Model No		DS-2TD2537T-10/Q	DS-2TD2537T-15/Q
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays	
	Resolution	384 x 288	
	Spectral Range	8 μm to 14 μm	
	NETD	<35 mK (25 °C, F# = 1.0)	
	Focal Length	9.7 mm	15 mm
	IIFOV	1.75 mrad	1.13 mrad
	Field of View	37.9° x 28.7°	24.2° x 18.4°
	Min. Focusing Distance	1.5 m	3 m
Visual Camera	Resolution	2688 x 1520, 4MP	
Measurement and Analysis	Object Temperature Range	-20°C to 550°C (-4°F to 1,022°F)	
	Temperature Accuracy	Max (± 2°C, ± 2%)	
Interface	Alarm Input	2-ch inputs (0 to 5 VDC)	
	Alarm Output	2-ch relay outputs, alarm response actions configurable	
	Communication Interface	1 RJ45 10M/100M Self-adaptive Ethernet interface	
General	Explosion-Proof Protection	ATEX: II 2 G Ex db IIC T6 Gb/II 2 D Ex tb IIIC T80°C Db IECEx: Ex db IIC T6 Gb/ Ex tb IIIC T80°C Db	
	Anti-Corrosion Protection	NEMA 4X (NEMA 250-2018), C5	
	Protection Level	IP68	
	Dimensions	286.7 mm x 175.2 mm x 150.1 mm (11.29" x 6.9" x 5.91")	

Heat Resistant Bullet Camera

- Temperature measurement range from -20°C to 550°C
- IP67-rated for harsh environment
- Working at high ambient temperature Environment up to 200°C with additional air or liquid cooling system



APPLICATIONS





Metal Smelting



Blast furnace



Cement Rotary Kiln

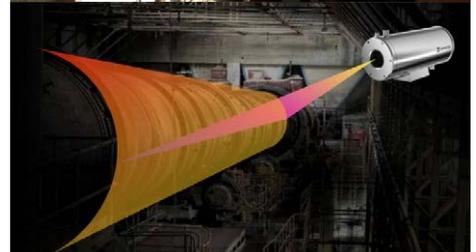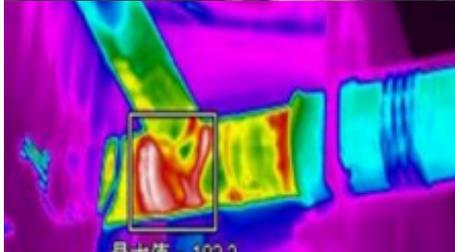

Model No.		HM-TD2H37T-4/X	HM-TD2H37T-7/X	HM-TD2H37T-10/X	HM-TD2H67T-6/X	HM-TD2H67H1-15/Q	HM-TD2H67H1-25/Q
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays					
	Resolution	384 x 288	384 x 288	384 x 288	640 x 512	640 x 512	640 x 512
	Spectral Range	8 μm to 14 μm					
	NETD	<35 mK (25 °C, F# = 1.0)					
	Focal Length	4.5 mm	6.5 mm	9.7 mm	6.3 mm	15 mm	25 mm
	Focus Mode	Focus Free				Auto & Manual	
	IFOV	3.78 mrad	2.62 mrad	1.75 mrad	2.70 mrad	1.13 mrad	0.68 mrad
	Field of View	90° × 65.2°	60° × 44.1°	37.5° × 28.5°	88.5° × 73.2°	41.5° × 33.3°	24.8° × 19.9°
	Image Frequency	50 Hz					
	Min. Focusing Distance	0.3 m	0.6 m	1.5 m	0.6 m	0.5 m	0.5 m
Measurement and Analysis	Object Temperature Range	-20 °C to 150 °C (-4 °F to 302 °F), 0°C to 550 °C (32 °F to 1022 °F)				0°C to 800°C (32°F to 1472°F), 600°C to 1800°C (1112°F to 3272°F)	
	Temperature Accuracy	Max (± 2 °C, ± 2%)				Object temperature 100°C to 1800°C (212°F to 3272°F), ±2% for ambient temperature 18°C to 25°C (64.4°F to 77°F) and ±3% for ambient temperature 25°C to 50°C (64.4°F to 77°F)	
	Measurement Presets	Hot Spot, Cold Spot					
Network	Integration Protocols	Modbus TCP, Modbus RTU, Onvif, SDK, ISAPI					
Interface	Alarm Input	1, alarm input (0-3.3 VDC)					
	Alarm Output	1, alarm output; NC, level quantity					
	Analog Output	1, CVBS output					
	Communication Interface	1, RJ45 10 M/100 M self-adaptive Ethernet interface 1, RS-485 interface (Modbus available)				1, RJ45 10 M/100 M/1000 M self-adaptive Ethernet interface 1, RS-485 interface (Modbus available)	
General	Power Supply	10-30 VDC, Max. 2.3 W				10-30 VDC, Max. 4.8 W	
	Protection Level	IP67					
	Dimensions	352.5 mm × 170.5 mm × 138 mm (13.88" × 6.71" × 5.43")					
High-temperature Resistance	Cooling Liquid	(application example with incoming water at 20 °C (68 °F) temperature): Ambient Temperature 80 °C (176 °F), Flow Rate above 0.65 L/min ; Ambient Temperature 100 °C (212 °F), Flow Rate above 1.22 L/min ; Ambient Temperature 150 °C (302 °F), Flow Rate above 1.76 L/min ; Ambient Temperature 200 °C (392 °F), Flow Rate above 3.3 L/min ;					
	Cooling Air	(application example with incoming air at 20 °C (68 °F) temperature and with pressure 7 bar): Ambient Temperature 70 °C (158 °F), Flow Rate above 15.34 m³/h ; Ambient Temperature 85 °C (185 °F), Flow Rate above 32.54 m³/h ; Ambient Temperature 100 °C (212 °F), Flow Rate above 37.82 m³/h ; Ambient Temperature 120 °C (248 °F), Flow Rate above 53.97 m³/h ;					

Bi-spectrum Bullet Camera

- Thermal camera with 384 x 288 pixels and visible camera with 2688x1520 pixels
- Temperature measurement range from -20°C to 550°C
- IP67-rated for protection against water and dust ingress



APPLICATIONS



Mechanical Monitoring



EV Charging Station



Forklift Filtering



Waste & Recycling


Model No		DS-2TD2637T-7/QY	DS-2TD2637T-10/QY	DS-2TD2637T-15/QY
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays		
	Resolution	384 × 288		
	Spectral Range	8 μm to 14 μm		
	Focal Length	6.5 mm	9.7 mm	15 mm
	I FOV	2.62 mrad	1.75 mrad	1.13 mrad
	Field of View	60° × 44.1°	37.5° × 28.5°	24.5° × 18.5°
	Min. Focusing Distance	0.6 m	1 m	2.5 m
Visual Camera	Resolution	2688 × 1520, 4MP		
Measurement and Analysis	Object Temperature Range	-20°C to 550°C (-4°F to 1,022°F)		
	Temperature Accuracy	Max (± 2°C, ± 2%)		
Network	Integration Protocols	ISAPI, SDK, ONVIF		
Interface	Alarm Input	2, alarm input (0-5 VDC)		
	Alarm Output	2-ch relay outputs, alarm response actions configurable		
	Analog Output	1.0V [p-p]/75Ω, PAL/NTSC/BNC		
	Communication Interface	1, RJ45 10 M/100 M Self-adaptive Ethernet interface. 1, RS-485 interface (half duplex)		
General	Power Supply	24 VAC ± 25%, 12 VDC ± 25%, 24VDC two-core terminal block PoE (802.3af, class 3)		
	Protection Level	IP67		
	Dimensions	376.1 mm × 119.1 mm × 118.1 mm (14.81" × 4.68" × 4.65")		

Mini PT Camera


- Thermal camera with 384 x 288 pixels and visible camera with 2688x1520 pixels
- Pan 360° continuous and tilt -90° to + 90° (auto flip)
- Temperature measurement range from -20°C to 550°C
- Lightweight and compact
- Preset tour for different areas monitoring




APPLICATIONS

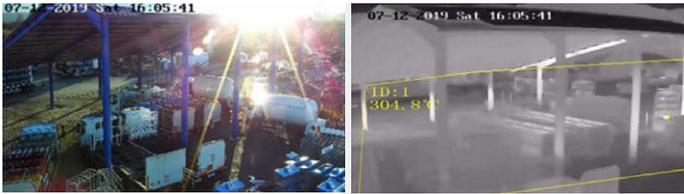

Factory

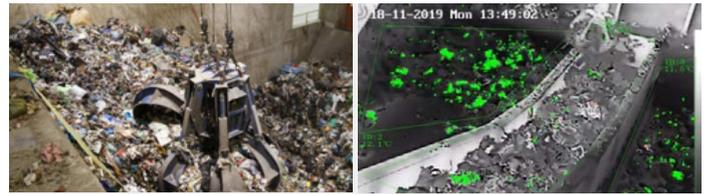

Waste & Recycling

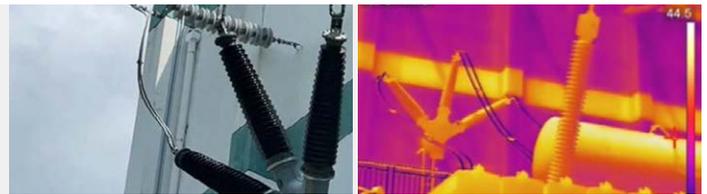

Transmission (Wildfire risks / Transmission / Terminal tower)

Model No		HM-TD5537T-7/W	HM-TD5537T-15/W	HM-TD5537T-25/W
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays		
	Resolution	384 × 288		
	Spectral Range	8 μm to 14 μm		
	NETD	≤ 35 mK (25°C, F# = 1.0)		
	Focal Length	6.3 mm	15 mm	25 mm
	I FOV	2.7 mrad	1.13 mrad	0.68 mrad
	Field of View	54.8° × 42.5°	24.55° × 18.54°	14.9° × 11.2°
	Min. Focusing Distance	0.6 m	0.5 m	1.5 m
Visual Camera	Resolution	2688 × 1520, 4MP		
Measurement and Analysis	Object Temperature Range	-20°C to 550°C (-4°F to 1022°F)		
	Temperature Accuracy	Max (± 2°C, ± 2%)		
Network	Integration Protocols	ISAPI, SDK, ONVIF		
Interface	Alarm Input	2-ch inputs (0 to 5 VDC)		
	Alarm Output	2-ch relay outputs, alarm response actions configurable		
	Communication Interface	1, RJ45 10M/100M self-adaptive Ethernet interface. 1, RS-485 interface		
General	Power Supply	24 VDC		
	Protection Level	IP67		
	Dimensions	321 mm × 194 mm × 153 mm (12.64" × 7.64" × 6.02")		

Bi-spectrum PT Camera

- Thermal camera with up to 640 x 512 pixels
- Visible camera with 2688x1520 pixels and 40x optical zoom
- Pan 360° continuous and tilt -90° to + 40° (auto flip)
- Temperature measurement range from -20°C to 550°C
- Preset tour for different areas monitoring



APPLICATIONS



Electric Power System



Power Generation (Coal / Natural gas / Wind / Solar)

Model No		DS-2TD4137T-9/W	DS-2TD4137T-25/W	DS-2TD4167T-9/W	DS-2TD4167T-25/W	
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays				
	Resolution	384 × 288		640 × 512		
	Spectral Range	8 μm to 14 μm				
	NETD	≤ 35 mK (25°C, F# = 1.0)			≤ 35 mK (@25°C, F#=1.1)	
	Focal Length	9 mm	25 mm	9 mm	25 mm	
	Focus Mode	Athermalized	Semi-auto & Manual	Athermalized	Semi-auto & Manual	
	I FOV	1.89 mrad	0.68 mrad	1.89 mrad	0.68 mrad	
	Field of View	37.9° × 28.7°	14.9° × 11.2°	72.0° × 56.1°	24.5° × 19.7°	
Min. Focusing Distance	1 m	1.5 m	1 m	1 m		
Visual Camera	Resolution	2688 × 1520, 4MP				
Measurement and Analysis	Object Temperature Range	-20°C to 550°C (-4°F to 1022°F)				
	Temperature Accuracy	Max (± 2°C, ± 2%)				
Network	Integration Protocols	ISAPI, SDK, ONVIF				
Interface	Alarm Input	7-ch inputs (0-5 VDC)				
	Alarm Output	2-ch relay outputs, alarm response actions configurable				
	Analog Output	1.0 V [p-p]/75 Ω, BNC for thermal channel				
	Communication Interface	1, RJ45 10 M/100 M Self-adaptive Ethernet interface. 1, RS-485 interface				
General	Power Supply	24 VAC ± 25%, 24VDC, 48VDC				
	Protection Level	IP66				
	Dimensions	266.6 mm × 410 mm × 198.6 mm (10.5" × 16.15" × 7.82")				

PTZ Position System


- Thermal camera with up to 640 x 512 pixels
- Visible camera with 2688x1520 pixels and 40x optical zoom
- Pan 360° continuous and tilt -90° to + 40° (auto flip)
- Temperature measurement range from -20°C to 550°C
- Electronic Image Stabilization



APPLICATIONS



Substation Transformer / Bushings / Breakers / Air reactor

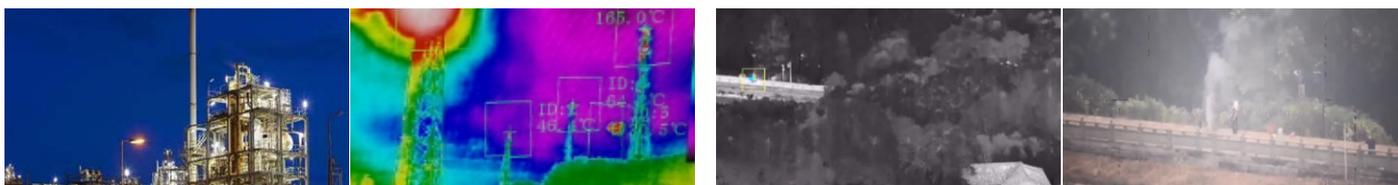

Flare Stacks


Forest Fire Detection

Model No		DS-2TD6237T-25H4L/W	DS-2TD6237T-50H4L/W	DS-2TD6267T-25H4L/W	DS-2TD6267T-50H4L/W
Thermal Module	Image Sensor	VOx Uncooled Focal Plane Arrays			
	Resolution	384 × 288		640 × 512	
	Spectral Range	8 μm to 14 μm			
	NETD	≤35 mK (@25°C, F#=1.1)			
	Focal Length	25 mm	50 mm	25 mm	50 mm
	Focus Mode	Semi-auto & Manual			
	IFOV	0.68 mrad	0.34 mrad	0.68 mrad	0.34 mrad
	Field of View	14.88° × 11.19°	7.47° × 5.61°	24.55° × 19.75°	12.42° × 9.95°
Min. Focusing Distance	1.5 m	7.5 m	1.5 m	7.5 m	
Visual Camera	Resolution	2688 × 1520, 4MP			
Measurement and Analysis	Object Temperature Range	-20°C to 550°C (-4°F to 1022°F)			
	Temperature Accuracy	Max (± 2°C, ± 2%)			
Network	Integration Protocols	ISAPI, SDK, ONVIF			
Interface	Alarm Input	7-ch inputs (0-5 VDC)			
	Alarm Output	2-ch relay outputs, alarm response actions configurable			
	Analog Output	1.0 V [p-p]/75 Ω, BNC for thermal channel			
	Communication Interface	1, RJ45 10 M/100 M Self-adaptive Ethernet interface. 1, RS-485 interface			
General	Power Supply	36VDC ± 20%, 48VDC ± 20%, two-core terminal block			
	Protection Level	IP66			
	Dimensions	486.1 mm × 337.6 mm × 450.3 mm (19.14" × 13.29" × 17.73")			


HIKMICRO STUDIO




A professional software client designed to manage the fixed thermal cameras.

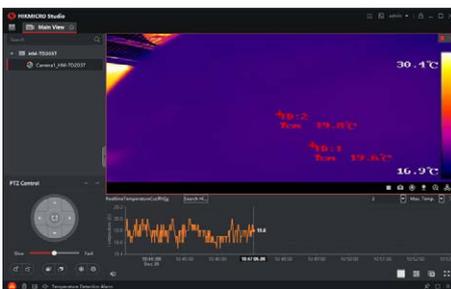

Real-time and Constant Temperature Measurement

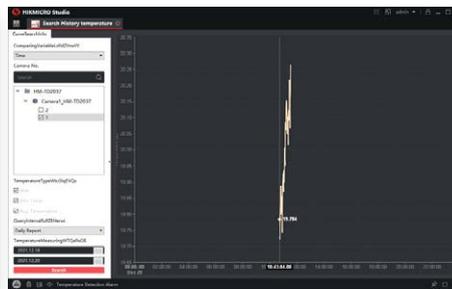

Temperature Data Storage & Report

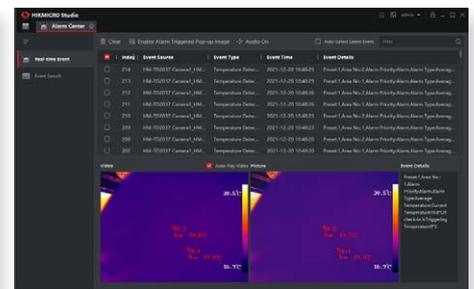

Alarm Notification and Remote Measurement Settings

HIKMICRO ANALYZER




EFFICIENT, POWERFUL THERMAL ANALYSIS AND REPORTING


HIKMICRO Analyzer is a powerful and free licensed PC software designed to help users manage and analyze thousands of thermal images and videos and quickly create professional reports. Compatible with files from HIKMICRO thermal cameras, providing the features you need to simplify your workflow and increase your productivity.

- ◆ Free license
- ◆ Import, edit and manage files
- ◆ View, edit and analysis radiometric images and videos
- ◆ Advanced measurement and image analysis
- ◆ Batch processing with all image and measurement controls
- ◆ Quick reporting with pre-defined or customized templates

THERMAL IMAGE ON SITE

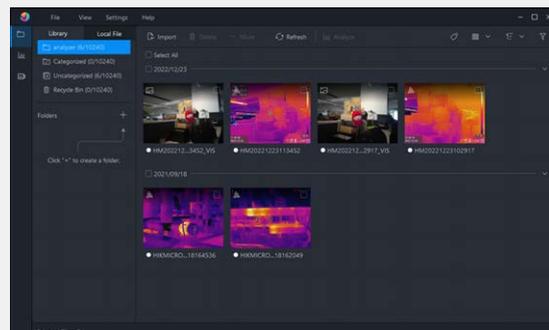

ANALYSIS ON COMPUTER

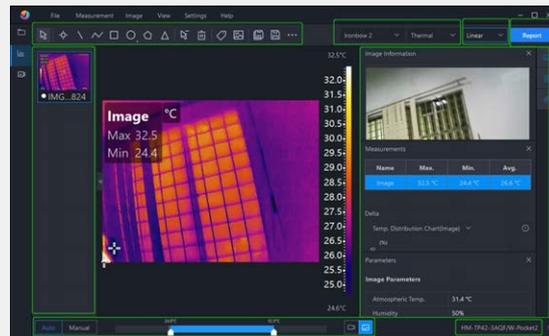

EXPORT REPORT



VISIT OUR WEBSITE



SEE THE WORLD IN A NEW WAY

